







Installation Instructions


Installing The ControlNet BNC Tap Sleeve

(Allen-Bradley Part Number 94238101)

Use these instructions to install a ControlNet™ BNC sleeve on these ControlNet coax taps (cat. nos. 1786-TPS/A, -TPYS/A, -TPR/A, -TPYR/A, 9904-TPS/A, -TPYS/A, -TPR/A, -TPYR/A):

Name	Straight T-tap	Straight Y-tap	Right-angle T-tap	Right-angle Y-tap
				
Cat. Nos.	1786-TPS/A 9904-TPS/A	1786-TPYS/A 9904-TPYS/A	1786-TPR/A 9904-TPR/A	1786-TPYR/A 9904-TPYR/A

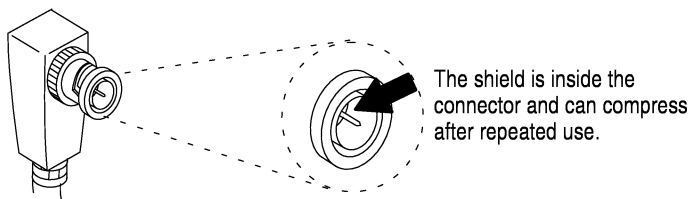
The nickel-plated ControlNet BNC sleeve helps prevent the shield —inside the BNC connector— from compressing after the shield has been repeatedly connected to a ControlNet device:




Using the sleeve improves the shield connection to the ControlNet device that the tap is connected to.

To install the ControlNet BNC sleeve:

- ① Remove the dust cap from the tap.



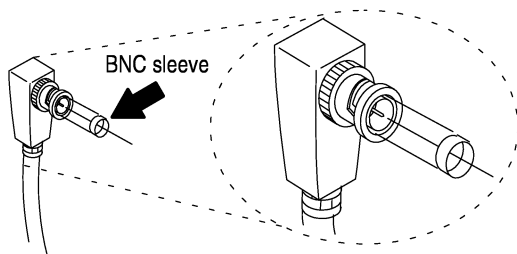- ② Using your fingers, place the BNC sleeve inside the plug body and press with your thumb until the sleeve is flush with the connector body.



Connect the tap to a ControlNet device as described in publication 1786-6.2.1, "ControlNet Cable System Planning and Installation Manual."

ControlNet is a trademark of Allen-Bradley Company, Inc.



Allen-Bradley

Worldwide representation.



Argentina • Australia • Austria • Bahrain • Belgium • Brazil • Bulgaria • Canada • Chile • China, PRC
• Colombia • Costa Rica • Croatia • Cyprus • Czech Republic • Denmark • Ecuador • Egypt • El
Salvador • Finland • France • Germany • Greece • Guatemala • Honduras • Hong Kong • Hungary •
Iceland • India • Indonesia • Ireland • Israel • Italy • Jamaica • Japan • Jordan • Korea • Kuwait •
Lebanon • Malaysia • Mexico • Netherlands • New Zealand • Norway • Pakistan • Peru • Philippines