




Flex I/O Terminal Base 3 Wire Cage Clamp

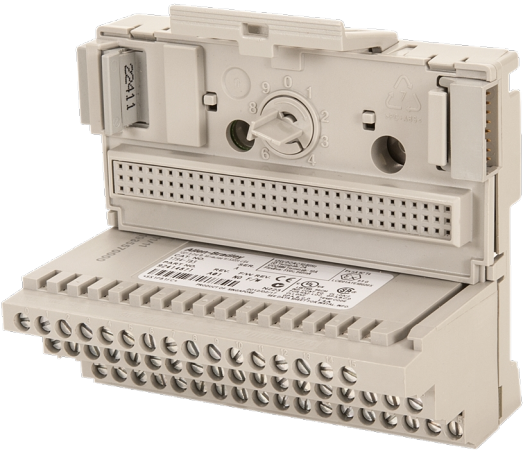

Representative Photo Only
(actual product may vary based on configuration selections)

- Reduced Space: Wire direct from sensor to terminal base and eliminate terminal strip
- Functionality: 4- to 32-point modules offer functions of larger rack-based I/O
- Increased Productivity: Easy configuration and setup of I/O modules using wizards speeds engineering and installation
- Reduced Downtime: Removal and Insertion Under Power (RIUP) and diagnostics
- Exceptional Choices: Over 90 catalogue numbers and a breadth of specialty modules meet the needs of a wide variety of applications
- Operation in Harsh Environments: Conformal coated and extreme environment rated modules are available. Contact NHP for further information.
- Network Flexibility: Communicates on EtherNet/IP™, ControlNet™, DeviceNet™ or PROFIBUS DP
- Improved Plant Operations: HART analog modules pass through HART data to asset management software or controller for improved plant operations

SPECIFICATIONS	
Product Series	Flex I/O (Bul.1794)
Component Type Fieldbus I/O	Terminal Bases
Operating Temperature, Max	55 °C max
Operating Temperature, Min	0 °C min

REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-