



DATA SHEET

# WT12L-2P140S03

W12  
Photoelectric sensors

# SICK

Sensor Intelligence



Illustration may differ

# PHOTOELECTRIC SENSORS

## WT12L-2P140S03

### ORDERING INFORMATION

| Type           | part no. |
|----------------|----------|
| WT12L-2P140S03 | 1026463  |

Further device versions and accessories at [www.sick.com/WT12](http://www.sick.com/WT12)



### DETAILED TECHNICAL DATA

#### FEATURES

|                             |                                                                     |
|-----------------------------|---------------------------------------------------------------------|
| Functional principle        | Photoelectric proximity sensor                                      |
| Functional principle detail | Background suppression                                              |
| Sensing range max.          | 30 mm ... 250 mm <sup>1)</sup>                                      |
| Emitted beam                | Light source Laser <sup>2)</sup>                                    |
|                             | Type of light Visible red light                                     |
|                             | Light spot size (distance) Ø 0.1 mm (100 mm)                        |
| Focus position              | 100 mm                                                              |
| Key laser figures           | Normative reference EN 60825-1:2014, IEC 60825-1:2007               |
|                             | Laser class 2 <sup>3) 4)</sup>                                      |
| Key LED figures             | Wave length 650 nm                                                  |
| Adjustment                  | Potentiometer                                                       |
| Special applications        | Detecting small objects, Detection of objects moving at high speeds |

<sup>1)</sup> Object with 6% remission factor (based on standard black, DIN 5033).

<sup>2)</sup> Average service life: 50,000 h at T<sub>u</sub> = +25 °C.

<sup>3)</sup> Pulse length 4 µs, max. pulse power < 5,0 mW.

<sup>4)</sup> Do not intentionally look into the laser beam. Never point the laser beam at people's eyes.

**ELECTRONICS**

|                             |                                                              |
|-----------------------------|--------------------------------------------------------------|
| Supply voltage $U_B$        | 10 V DC ... 30 V DC <sup>1)</sup>                            |
| Ripple                      | < 5 V <sub>pp</sub> <sup>2)</sup>                            |
| Current consumption         | 55 mA <sup>3)</sup>                                          |
| Protection class            | III                                                          |
| Digital output              | Type PNP <sup>4)</sup><br><sup>5)</sup>                      |
| Switching mode              | Light switching, Dark switching <sup>4) 5)</sup>             |
| Switching mode selector     | Selectable via L/D control cable                             |
| Signal voltage PNP HIGH/LOW | $U_v - < 2 \text{ V}, U_v / 0 \text{ V}, \leq 1.5 \text{ V}$ |
| Signal voltage NPN HIGH/LOW | $U_v - < 2 \text{ V}, U_v / 0 \text{ V}, \leq 1.5 \text{ V}$ |
| Output current $I_{max}$    | $\leq 100 \text{ mA}$                                        |
| Response time               | $\leq 200 \mu\text{s}$ <sup>6)</sup>                         |
| Switching frequency         | 2,500 Hz <sup>7)</sup>                                       |
| Circuit protection          | A <sup>8)</sup><br>C <sup>9)</sup><br>D <sup>10)</sup>       |

<sup>1)</sup> Limit values when operated in short-circuit protected network: max. 8 A.

<sup>2)</sup> May not fall below or exceed  $U_v$  tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> 0 V or not connected, light switching.

<sup>5)</sup>  $U_v$ , dark switching.

<sup>6)</sup> Signal transit time with resistive load.

<sup>7)</sup> With light/dark ratio 1:1.

<sup>8)</sup> A =  $V_B$  connections reverse-polarity protected.

<sup>9)</sup> C = interference suppression.

<sup>10)</sup> D = outputs overcurrent and short-circuit protected.

**MECHANICS**

|                        |                                             |
|------------------------|---------------------------------------------|
| Housing                | Rectangular                                 |
| Dimensions (W x H x D) | 15 mm x 49 mm x 41.5 mm                     |
| Connection             | Cable with M8 male connector, 4-pin, 300 mm |
| Connection detail      | Length of cable (L) 300 mm                  |
| Material               | Housing Metal<br>Front screen Plastic, PMMA |
| Weight                 | 130 g                                       |

**AMBIENT DATA**

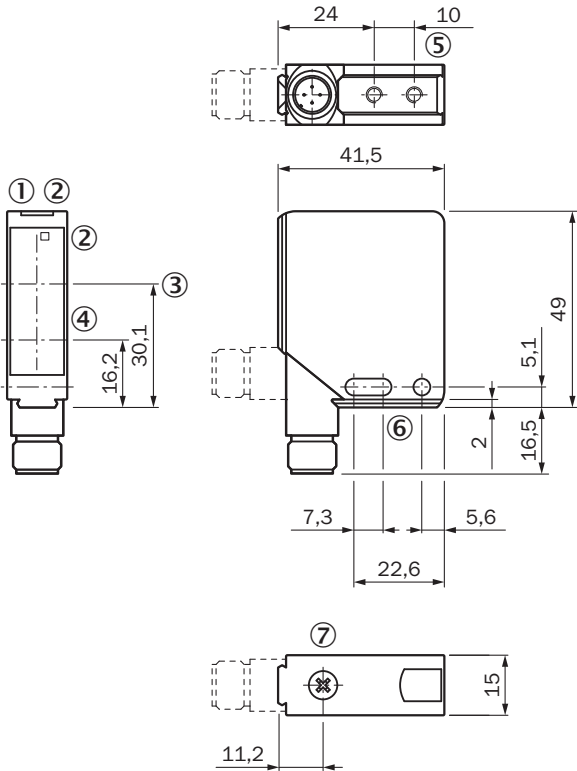
|                               |                              |
|-------------------------------|------------------------------|
| Enclosure rating              | IP67                         |
| Ambient operating temperature | -10 °C ... +50 °C            |
| Ambient temperature, storage  | -25 °C ... +75 °C            |
| UL File No.                   | NRKH.E181493 & NRKH7.E181493 |

**CERTIFICATES**

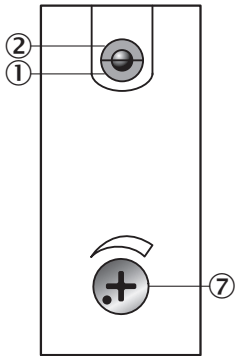
|                              |   |
|------------------------------|---|
| EU declaration of conformity | ✓ |
|------------------------------|---|

|                                                     |   |
|-----------------------------------------------------|---|
| UK declaration of conformity                        | ✓ |
| ACMA declaration of conformity                      | ✓ |
| Moroccan declaration of conformity                  | ✓ |
| China RoHS                                          | ✓ |
| China Compulsory Product Certification (CCC) exempt | ✓ |
| cULus certificate                                   | ✓ |
| Laser safety (IEC 60825-1) certificate              | ✓ |


DIMENSIONAL DRAWING WT12L-2



- Dimensions in mm (inch)
- ① Operating indicator, green
  - ② LED reception indicator, yellow
  - ③ Optical axis, receiver
  - ④ Optical axis, sender
  - ⑤ M4 threaded mounting hole – 4 mm depth
  - ⑥ Mounting hole, Ø 4.2 mm
  - ⑦ Adjustment of sensing range

**ADJUSTMENTS WT12L-2**

- ① Operating indicator, green
- ② LED reception indicator, yellow
- ⑦ Adjustment of sensing range

**CONNECTION TYPE**

Further information as well as suitable accessories, example applications and downloads such as CAD dimensional models, operating instructions and software can be found at [www.sick.com/1026463](http://www.sick.com/1026463)



SICK AG  
WALDKIRCH  
GERMANY  
SICK.COM

# SICK AT A GLANCE

SICK is a leading global technology company for intelligent sensors and integrated solutions in industrial automation. Our technologies set benchmarks, making your industrial processes more efficient, safer and more sustainable – both in logistics and manufacturing operations.

SICK combines sensor intelligence with industry expertise and certified consulting services. We provide the ideal foundation for scalable as well as tailor-made automation solutions and create added value along the entire value chain. Our close partnerships with our customers are more than just a promise: Together, we optimize productivity, improve quality, protect health and safety, and help build a sustainable future. All with empathy and trust.

Since 1946, we have been developing innovative technologies with passion and a pioneering spirit. With a global network in around 40 countries, SICK has a global presence and is always close by. The company's headquarters are located in Waldkirch near Freiburg, Germany. Our customers benefit from our understanding of both local and global requirements, which enables us to deliver tailor-made solutions

**SICK**  
Sensor Intelligence